



15 years  
product  
warranty



# TIN ROOF MOUNTING SYSTEM

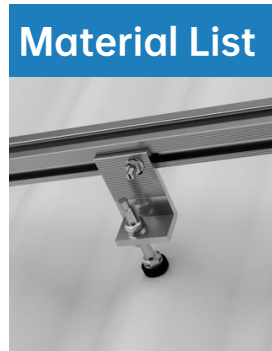

Application	Tin Roof
Roof slope	Up to 60°
Building height	Up to 20m
Wind Speed	80m/s
Snow Load	100cm
Module orientation	Landscape, Portrait
Distance between roof fixing points	Up to 2 m standard (further distance possible on request)
Supporting profiles	Extruded aluminium
Hooks, small parts	Stainless steel (V2A), Aluminium
Color	Aluminium: plate finish; Visible components available in black
Design Standard	JIS C 8955:2017,AS/NZS1170,BS Standard, Etc

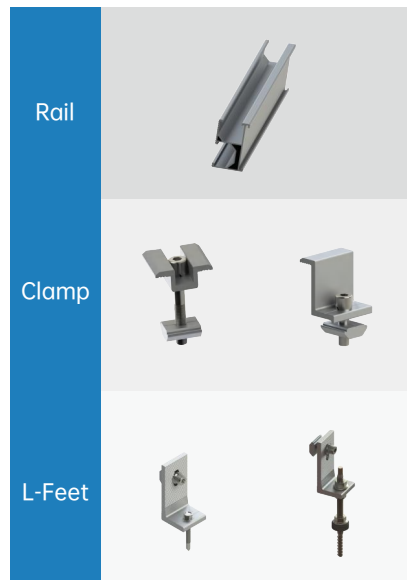

Contact Us for More Information